

COMPONENTS FOR CONVEYORS

magris



MAKES MOVING



magris prides itself on forty years of experience as one of the leader manufacturer of hinged slot chains and accessories in steel/stainless steel and thermoplastic resin for conveyor belts used in packaging, bottling, glass, pharmaceutical, chemical, food, mechanical industry, etc.




Nowadays, the magris team continues this activity exporting all over the world through a qualified network of agents and distributors and also a short delivery time is granted through a warehouse containing large quantities of the most required items (up to 1.000 metres each chain type); non-stock and tailor-made orders can be supplied in short term.

The choice of chain materials has been specifically studied by skilled specialists and developed in cooperation with the main stainless steel and thermoplastic manufacturers, as far as the final performance is granted by chain tests which strictly conform to international regulations, e.g. careful inspections carried out during all the stages of production, whose quality is constantly supported by technological researches.

magris production range for conveyor belts includes:

- Steel/stainless steel hinged slot chains;
- Thermoplastic hinged slot chains;
- Sprockets and idlers, curves, guide rails profiles, accessories and components in thermoplastic resin.

Thermoplastic straight running chains - Single hinge 820 SERIES

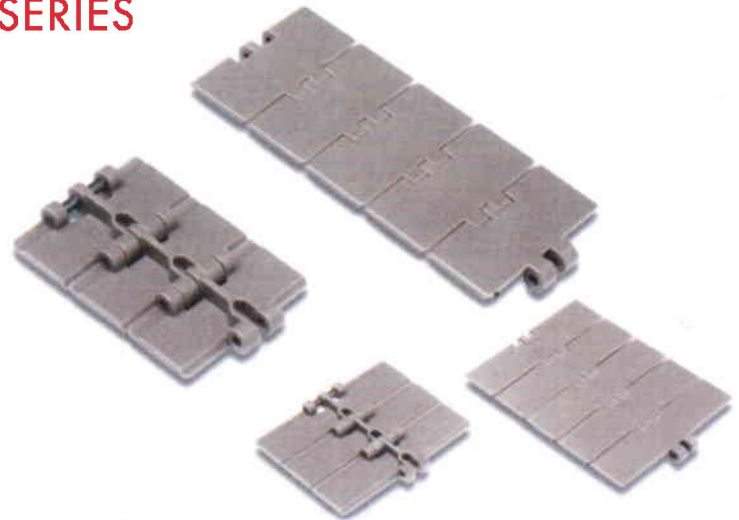

LFA 820

LOW FRICTION ACETAL RESIN

- Plates in self-lubricating low friction acetal resin, light brown-coloured.
- Pins in special chrome-nickel stainless steel, work hardened for high resistance.

PRODUCT CODES






LFA 820 K250	internal code 6.10.020
LFA 820 K325	internal code 6.10.040
LFA 820 K330	internal code 6.10.042
LFA 820 K343	internal code 6.10.043
LFA 820 K350	internal code 6.10.060
LFA 820 K400	internal code 6.10.070
LFA 820 K450	internal code 6.10.080
LFA 820 K500	internal code 6.10.090
LFA 820 K600	internal code 6.10.100
LFA 820 K750	internal code 6.10.110

CHARACTERISTICS

	Width L (mm)	Thickness S (mm)	Height h (mm)	Weight kg/m
LFA 820 K250	63.5	4	9.5	0.73
LFA 820 K325	82.5	4	9.5	0.83
LFA 820 K330	83.8	4	9.5	0.83
LFA 820 K343	87.0	4	9.5	0.85
LFA 820 K350	88.9	4	9.5	0.85
LFA 820 K400	101.6	4	9.5	0.95
LFA 820 K450	114.3	4	9.5	1.03
LFA 820 K500	127.0	4	9.5	1.10
LFA 820 K600	152.4	4	9.5	1.25
LFA 820 K750	190.5	4	9.5	1.47

- Standard shipping lengths = 80 pitches = 10 feet = 3,048 metres.
- These chains can be supplied either with pins in austenitic stainless steel, work hardened, highly wear resistant, or with pins in thermoplastic resin.

Straight running chains - Single hinge

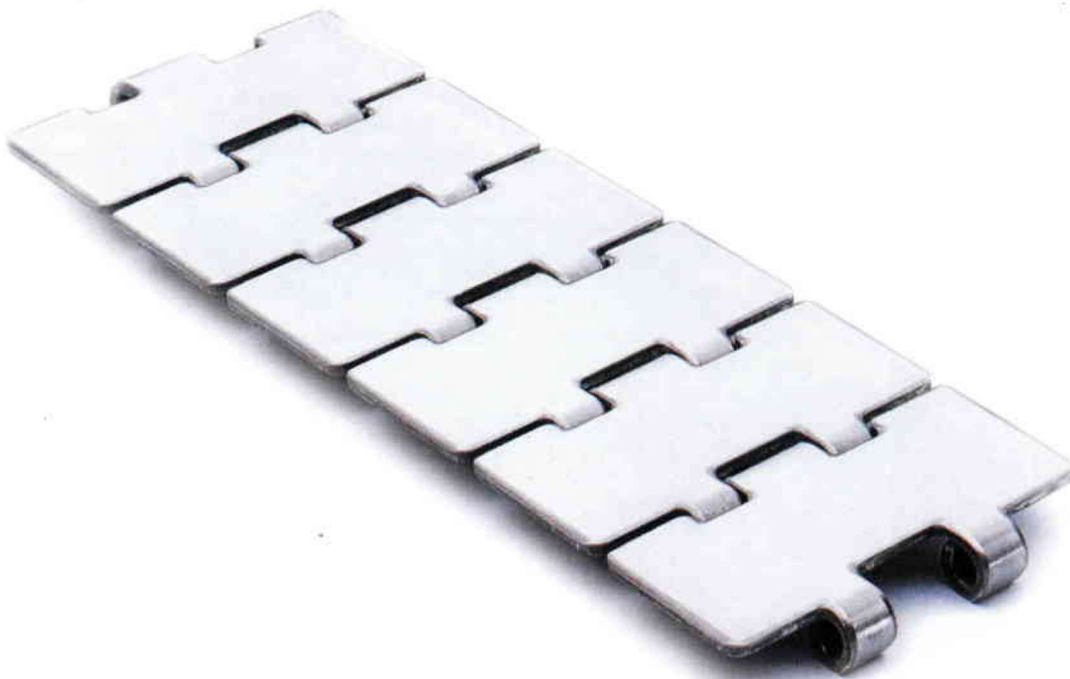

SUPER - HARD INOX


- Special, chrome-nickel, stainless steel slats, work hardened for high resistance, with shiny surface having a roughness of $R_a \leq 0,3$ micron.
- AISI 431 stainless steel pins, magnetic and work hardened for high resistance.

PRODUCT CODES

SSH 812 K225	internal code S.7.00.015
SSH 812 K250	internal code S.7.00.021
SSH 812 K263	internal code S.7.00.025
SSH 812 K275	internal code S.7.00.200
SSH 812 K300	internal code S.7.00.031
SSH 812 K325	internal code S.7.00.041
SSH 812 K330	internal code S.7.00.042
SSH 812 K350	internal code S.7.00.061
SSH 812 K400	internal code S.7.00.070
SSH 812 K450	internal code S.7.00.080
SSH 812 K600	internal code S.7.00.100
SSH 812 K750	internal code S.7.00.110

CHARACTERISTICS




	Slat width (mm/ ")	Hardness (HRC)	GP (mm)	RCC (mm)	Weight kg/m
SSH 812 K225	57.1 2 1/4	30	1.6	150	2.18
SSH 812 K250	63.5 2 1/2	30	1.6	150	2.25
SSH 812 K263	66.7 2 5/8	30	1.6	150	2.33
SSH 812 K275	69.9 2 3/4	30	1.6	150	2.35
SSH 812 K300	76.2 3	30	1.6	150	2.50
SSH 812 K325	82.5 3 1/4	30	1.6	150	2.65
SSH 812 K330	83.8 3 19/64	30	1.6	150	2.70
SSH 812 K350	88.9 3 1/2	30	1.6	150	2.75
SSH 812 K400	101.6 4	30	1.6	150	3.00
SSH 812 K450	114.3 4 1/2	30	1.6	150	3.30
SSH 812 K600	152.4 6	30	1.6	150	4.20
SSH 812 K750	190.5 7 1/2	30	1.6	150	5.10



Thermoplastic straight running chains - Single reinforced hinge

LBP 8257 SERIES **NEW**

- High breaking load.
- Rollers are made in special material for low friction and high wear resistance.
- Very low back-line pressure.
- Extremely quiet running of the rollers.
- Pins rollers support of 5 mm diameter, plugged-in and locked at the ends.

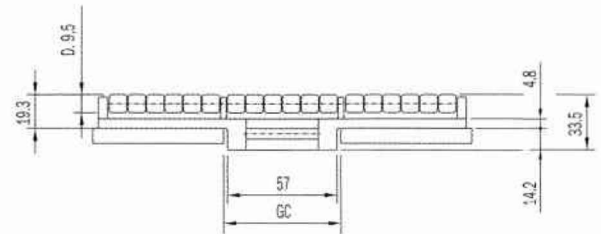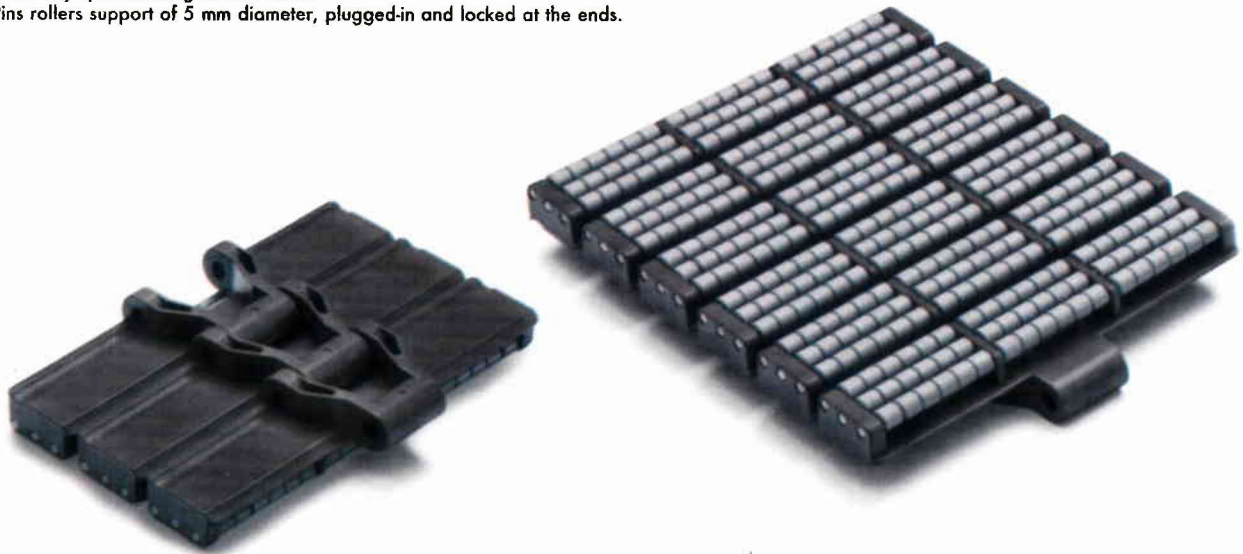

LBP 8257

SUPER PERFORMANCE ACETAL RESIN

- Plates in self-lubricating very low friction acetal resin, dark grey-coloured.
- Rollers are made of special wear resistance acetal resin, light-grey coloured.
- Pins in special stainless steel, 400 series, work hardened, magnetic, highly wear resistant.




PRODUCT CODES

LBP 8257 K750	internal code 6.20.175LBP
LBP 8257 K1000	internal code 6.20.185LBP
LBP 8257 K1200	internal code 6.20.195LBP

CHARACTERISTICS

	Width L (mm)	GC (mm)	Weight kg/m
LBP 8257 K750	190.5	60	5.65
LBP 8257 K1000	254.0	60	7.2
LBP 8257 K1200	304.8	60	8.1

- Standard shipping lengths = 40 pitches = 5 feet = 1,524 metres.

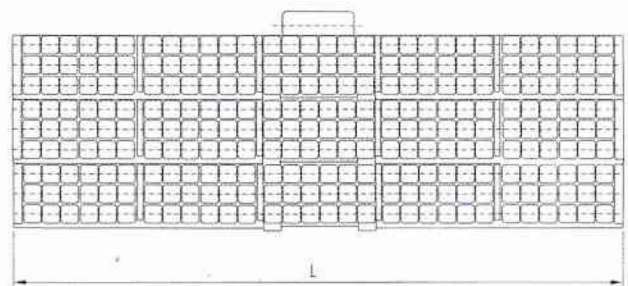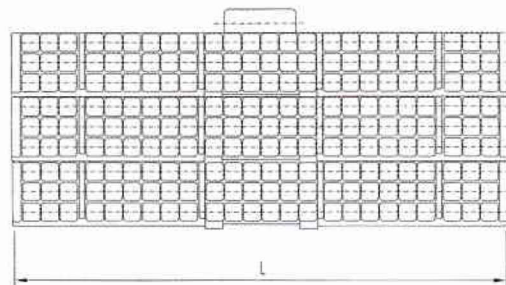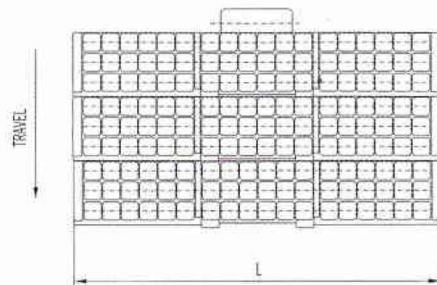


Biplanar thermoplastic chains

1700 / 1700 TAB SERIES



WLF 1700

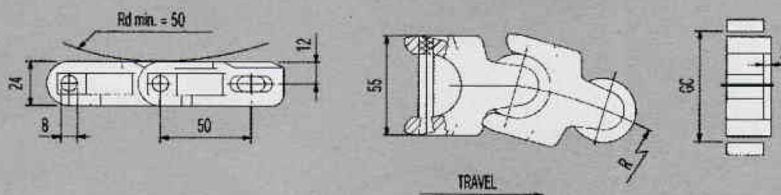

1700

LOW FRICTION ACETAL RESIN

- Plates in self-lubricating low friction acetal resin.
- Pins in austenitic chrome-nickel stainless steel, work hardened for high resistance.

PRODUCT CODES

WLF 1700	white colour	internal code 1700.WA
LFA 1700	light brown colour	internal code 1700.LFA

CHARACTERISTICS

		Radius R (mm)	GC st. (mm)	GC sid. (mm)	Weight kg/m
WLF 1700	white colour	140	58	58	1.26
LFA 1700	light brown colour	140	58	58	1.26

- Standard shipping lengths = 122 pitches = 20 feet = 6,10 metres.



WLF 1700 TAB

1700 TAB

LOW FRICTION ACETAL RESIN

- Plates in self-lubricating low friction acetal resin.
- Pins in austenitic chrome-nickel stainless steel, work hardened for high resistance.


PRODUCT CODES

WLF 1700 TAB	white colour	internal code 1700TAB.WA
LFA 1700 TAB	light brown colour	internal code 1700TAB.LFA

CHARACTERISTICS

		Raggio R (mm)	GC st. (mm)	GC sid. (mm)	Weight kg/m
WLF 1700 TAB	white colour	140	58	58	1.30
LFA 1700 TAB	light brown colour	140	58	58	1.30

- Standard shipping lengths = 122 pitches = 20 feet = 6,10 metres.

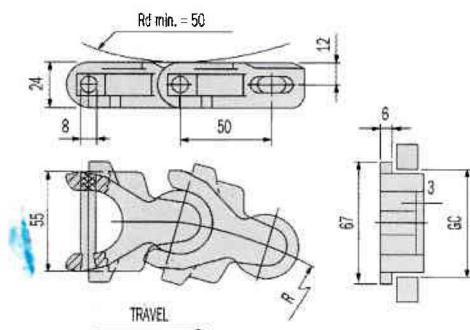

GreatOrientalTrading
www.gotrading.co.th

@gotrading f GreatOrientalTrading 097-3619703

1049 ถนนสุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพฯ 10110