


Accurate Adjustable Capacity / Handling Most of Chemicals

This pump is designed and manufactured to be enduring for handling most of chemicals in Chemical plant, Water supply, Sewage system, Disposal treatment, Plant drainage system etc.


Maximum discharging capacity reaches to 54L/min !!!

Series AH - CHARACTERISTIC

- ★ High discharge accuracy.
- ★ Various connection types available: Flange, union, hose. (AHA01 to 32: PVC)
- ★ PVC, SUS304, SUS316 diaphragm heads available. ※PVDF material can only be produced in AHA01-42
- ★ Motors: S. F. :1.15 F class, IP55 Outdoor services. (AHA & AHB standard type only)

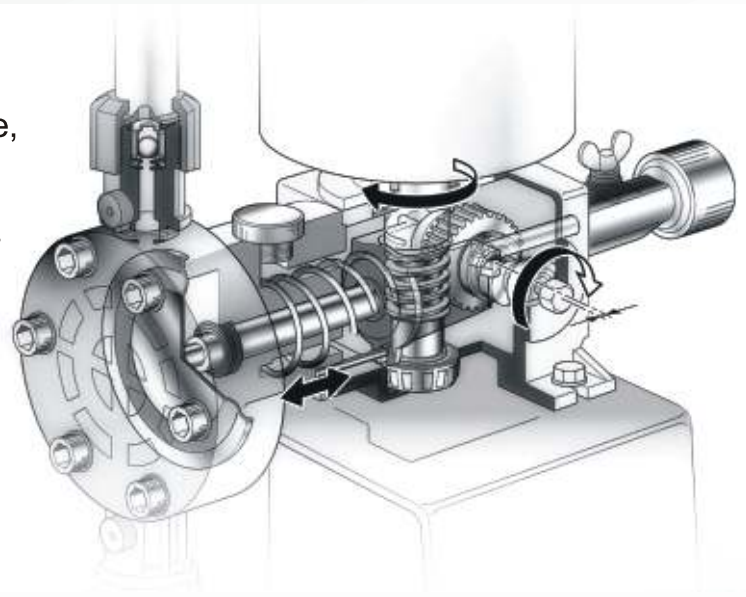

Series AH - PUMP HEAD

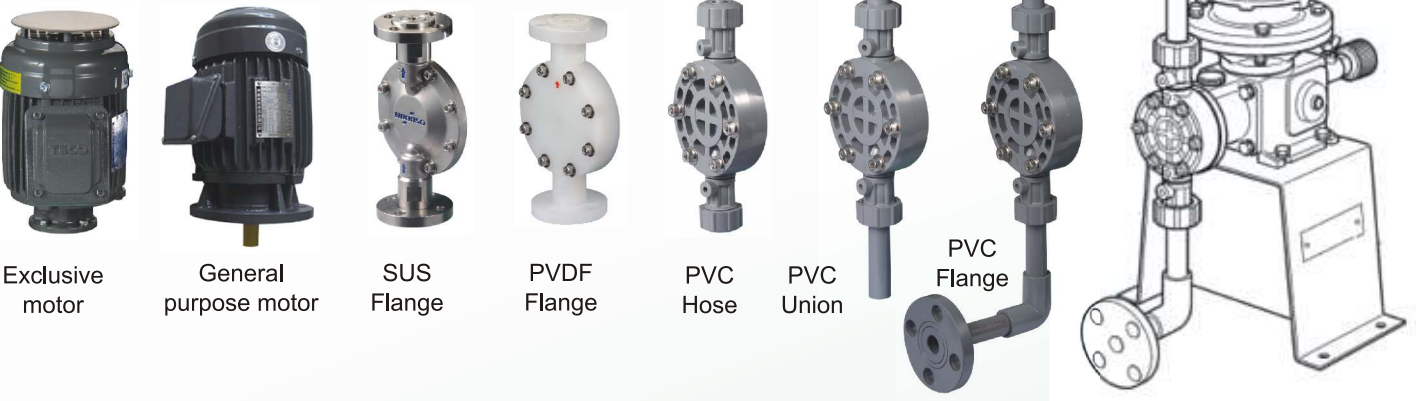

Model Numbering System

AH		A 3 2		P C E		F N 2 E SP	
1		2		5		8	
Pump series		3		6		9	
		4		7		10	
		No. of stroke		Pump head		O ring/Gasket	
		Symbols		Symbols		Symbols	
		spm		Material		Material	
		1 48/58		P PVC		E EPDM ※※	
		2 96/116		S SUS304		F FPM ※※	
				M SUS316		T PTFE	
				D PVDF			
				T PTFE			